



# BS88, IEC269 Industrial HRC Fuse Links


## Offset Blade Tags 550V ac and 415V ac Motor Rated

**NSD**

### Time-Current Characteristic Curves

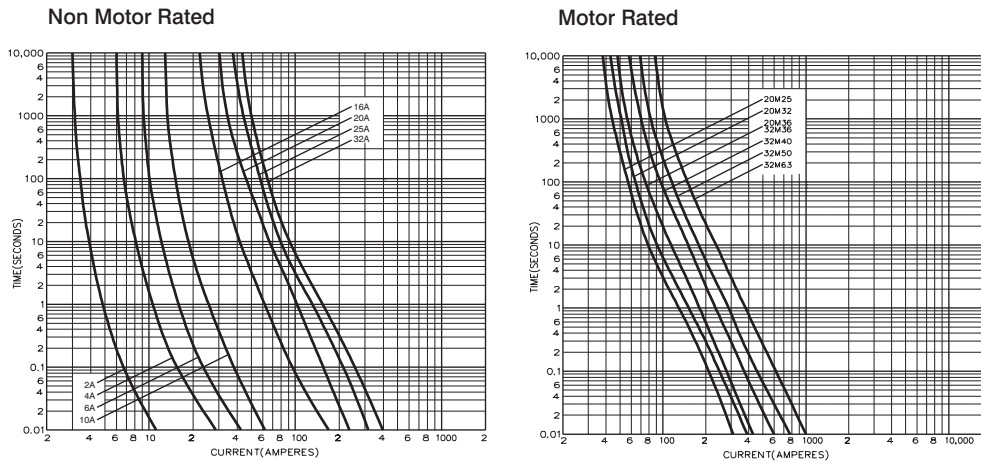

### Dimensional Data

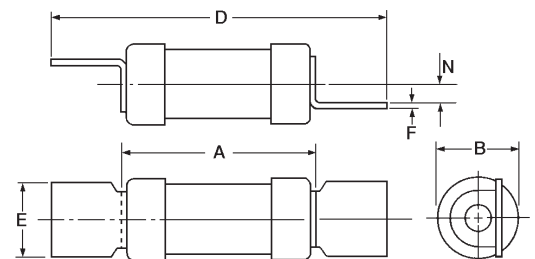

The NSD range of Fuse Links comply with general purpose gG characteristics and fit into the SAFELOC Fuse Holders and into the CAMLOC Distribution Fuseboard System.

Packaging - 20 per carton

Catalog Number	I <sup>2</sup> t (Amp <sup>2</sup> Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (inches/mm)					
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	D	E	F	N
NSD2	2	1.3	4.6	0.9	550 ac	1.36 34.5	.54 13.8	2.39 58.5	.50 12.7	.03 .80	.14 3.5
NSD4	4	8	27	1.4							
NSD6	6	29	100	1.8							
NSD10	10	120	400	2.1							
NSD16	16	120	470	1.8							
NSD20	20	260	1070	1.8							
NSD25	25	560	2300	2.0							
NSD32	32	710	3000	2.9							
NSD20M25	20M25	570	2350	1.2	415 ac	.69 17.5					
NSD20M32	20M32	770	3000	0.95							
NSD20M36	20M36	1150	5000	0.88							
NSD32M36	32M36	1150	5000	2.4							
NSD32M40	32M40	1500	6000	1.9							
NSD32M50	32M50	2700	8700	1.4							
NSD32M63	32M63	5000	13550	1.0							

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



**Bussmann Division**  
**Cooper (U.K.) Ltd**  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom  
 Tel: (44) (0)1509 88 27 37  
 Fax: (44) (0)1509 88 27 86

**Head Office**  
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445

